

GENERALVERTRETUNG  
FÜR ÖSTERREICH



+43 316 29 14 97



FENIKSBUS®



FENIKSBUS FBI MIDI

FBI P Suburban, School

Flexible for any route

# FBI P

## General data

- Dimension(mm): 8.000–9.300 x 2.350 x 2.870 (3.000 with A/C)
- GVW: 7.200 kg
- Seat configuration: Up to 37
- Total No. of passenger: Up to 40(combination seating &standing)
- Homologation: Category M3, Class II or III; COC based on EU-WVTA

## Chassis

- Chassis: Iveco Daily 70C; Wheelbase(mm): 4.350, 4.750 or 5.100
- Engine: Iveco, 4 cylinders, 2.998cm<sup>3</sup>; Diesel or CNG
- Engine powerkW(HP): 100,0(136) -155,0(210)
- Gear box: Automatic(8+1); \*Option: Manual(6+1)
- Brakes: Disc on all wheels; ESP9; \*Option: Retarder TELMA
- Suspension: Front-Independent; Rear - Pneumatic; \*Option: Parabolic
- Fuel tank capacity(L): Diesel - up to120; CNG - Up to 414
- Wheels &Tyres: 225/75R16

## Body

- Body Superstructure: HQ-Stainless steel; Option: Towing device
- Side walls-sheathing: Aluminium panels, glued
- Front and rear wall, rear bumper, roof, mudguards: Polyester
- Colour: White RAL 9002; Option: Special, following customer request

## Glassing

- Windshield: Laminated; Option el. heated
- Side windows passenger area: Single; Option: Double glassing tinted
- Door windows: Double
- Side driver's window: Sliding, heated
- Roof escape hatch: Single tinted; Option: Double glassed; Two hatches

## Access & Luggage

- Floor: Flat, Anti sliding
- Front/Rear door: 800 mm, outwards opening, electro mechanism, safety locks
- Rear door: 800/1.000 mm, outwards opening, mechanical, safety locks
- Options: Internal Luggage racks; External luggage compartment; EH Wheelchair lift at rear door; Wheelchair fixation & safety anchorage

## A/C, Ventilation

- A/C: \* Option 1- driver area; air distribution front panel; ATC
- A/C: Option 2 - passenger area; air distribution longitudinal ABS channels; ATC
- Front panel ventilation & defrosting
- Vent. openings: Sliding side windows; Roof hatch

## Heating system

- Liquid heating acting via radiators L+R; Option: Ventilated heat exchangers
- \*Option 1: Independent heater for driver area(5,0kW)
- Option 2: Independent heater for passenger area (up to 16,0 kW); ATC

## Passenger safety

- Indirect vision: External mirrors, electrically controlled & heated; Interior mirrors; Options: Electronic RV mirrors; RV Camera; Bird eye CMS
- Sunblock curtain for driver: Windshield & side window
- Rails: Stainless; Longitudinal on ceiling and around doors; Option: Coloured yellow
- Partitions: Rails with barriers (glass or ABS panels)
- Option-safety systems: \* AEBS; LDWS; Automatic FSS; CMS; School signs

## Electrical equipment


- Chassis electrical system: 12V, Battery: 110Ah; Option: 2x110Ah
- Alternator: 12V - 150A; \*Option: 180A or 220A
- Exterior and interior lighting: LED lights
- Options: Audio/Video system; CMS; Electronic pass. info system; Ticketing

## Seats

- Driver's seat: Adjustable, suspended; Option: Electro-pneumatic
- Passenger seats: Regional/Line type; Options: Hostess/Teacher seat, School, Intercity type, Diverse colours, upholstery patterns and materials; Adjustment systems; Flexible seat anchorage, etc

Remark: All Options marked with \* are possible only with relevant chassis configuration!

PASSENGERS SEATS-Typical Lay-out: 31+(1)

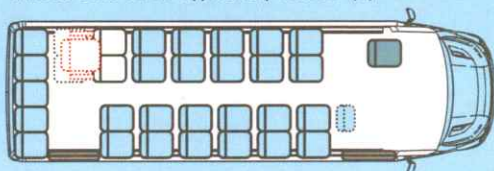

Flexible for any route



FENIKSBUS®